


# G7VP2

rev. B+

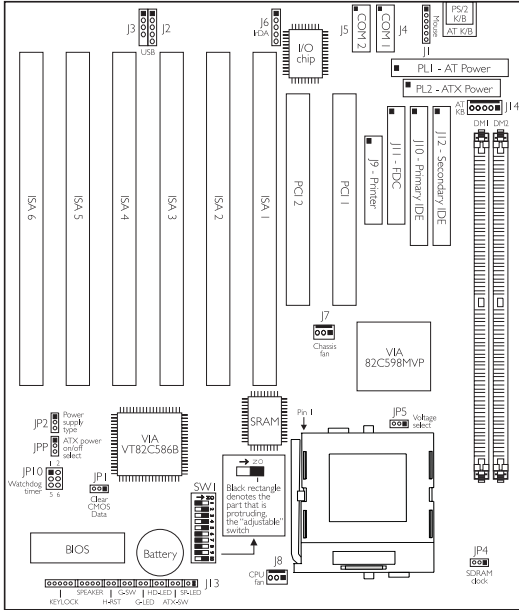

Voltage	JP5	SW1: 7-10
2.1V		
2.2V		
2.4V		
2.5V		
2.8V		
2.9V		
3.2V		
3.3V		
3.5V		

AMD - SW1: I-6	
K6-2/266 - 66MHz - 4x	
K6-2/300 - 66MHz - 4.5x	
K6-2/300 - 100MHz - 3x	
K6-2/333 - 66MHz - 5x	
K6-2/333 - 95MHz - 3.5x	
K6-2/350 - 100MHz - 3.5x	
K6-2/366 - 66MHz - 5.5x	
K6-2/380 - 95MHz - 4x	
K6-2/400 - 100MHz - 4x	
K6-2/450 - 100MHz - 4.5x	
K6-III/400 - 100MHz - 4x	

Cyrix - SW1: I-6	
M II-200 - 66MHz - 2.5x	
M II-266 - 66MHz - 3x	
M II-300 - 66MHz - 3.5x	
M II-300 - 75MHz - 3x	
M II-333 - 66MHz - 4x	
M II-333 - 75MHz - 3.5x	
M II-333 - 83MHz - 3x	
M II-366 - 83MHz - 3.5x	
M II-366 - 100MHz - 2.5x	
M II-380 - 100MHz - 3x	
M II-400 - 95MHz - 3.5x	

IDT - SW1: I-6	
WinChip2-200 - 66MHz - 3x	
WinChip2-225 - 75MHz - 3x	
WinChip2-233 - 66MHz - 3.5x	
WinChip2-266 - 100MHz - 2.33x	
WinChip2-300 - 100MHz - 2.5x	

IBM - SW1: I-6	
6x86MX-PR200 - 66MHz - 2.5x	
6x86MX-PR233 - 75MHz - 2.5x	
6x86MX-PR266 - 83MHz - 2.5x	
6x86MX-PR300 - 66MHz - 3.5x	
6x86MX-PR300 - 75MHz - 3x	
6x86MX-PR333 - 83MHz - 3x	

JP10 - Watchdog Timer			
Time	1-2	3-4	5-6
0.5 sec	On	On	On
1 sec	Off	On	On
2 sec	On	Off	On
4 sec	Off	Off	On
8 sec	On	On	Off
16 sec	Off	On	Off
32 sec	On	Off	Off
64 sec	Off	Off	Off

Intel - SW1: I-6	
MMX166MHz* - 66MHz - 2.5x	
MMX200MHz - 66MHz - 3x	
MMX233MHz - 66MHz - 3.5x	

\* denotes default setting

- Jumper JP1 (CMOS Clear) - 1-2 On: Clear CMOS data; 2-3 On: Normal (default)  
If you are using an ATX power supply, make sure to power-off your system and unplug the power cord before cleaning the CMOS data.
- Jumper JP4 (SDRAM Clock) - 1-2 On: SDRAM CLK = AGP CLK (default); 2-3 On: SDRAM CLK = CPU CLK
- Jumper JP2 (Power Supply Type) - 1-2 On: ATX power supply; 2-3 On: AT power supply (default)
- Jumper JPP (ATX Power-on/off Select) - 1-2 On: ATX power (default); 2-3 On: AC power