

Notice to End Users

This User's Guide & Technical Reference is for assisting system manufacturers and end users in setting up and installing the mainboard.

Every effort has been made to ensure that the information in this manual is accurate. Soltek Computer Inc. is not responsible for printing or clerical errors. Information in this document is subject to change without notice and does not represent a commitment on the part of Soltek Computer Inc.

No part of this manual may be reproduced, transmitted, translated into any language in any form or by any means, electronic or mechanical, including photocopying and recording, for any purpose without the express written permission of Soltek Computer Inc.

Companies and products mentioned in this manual are for identification purposes only. Product names appearing in this manual may or may not be registered trademarks or copyrights of their respective companies.

SOLTEK COMPUTER INC. PROVIDES THIS MANUAL "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL SOLTEK COMPUTER INC. BE LIABLE FOR ANY LOSS OR PROFITS, LOSS OF BUSINESS, LOSS OF USE OR DATA, INTERRUPTION OF BUSINESS, OR FOR INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES OF ANY KIND, EVEN IF SOLTEK COMPUTER INC. HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES ARISING FROM ANY DEFECT OR ERROR IN THIS MANUAL OR PRODUCT.

© Copyright 1996 Soltek Computer Inc. All right reserved

Edition: March 1997

Version: 2.0

SL-53A2/A5 SERIAL

Contents

Chapter 1: Introduction	5
Features	5
CPU	5
Chipset	5
L2 Cache	5
Main Memory	5
BIOS	6
Giga I/O Function	6
Other Functions	6
Mainboard Layout with Default Settings	7
Chapter 2: Hardware Setup	8
INTEL Pentium MMX CPU Settings	8
INTEL Pentium MMX — 166/200/233 MHz	8
AMD K6 CPU Settings	9
AMD K6 – PR2–166/200/233 MHz	9
Cyrix M2 CPU Settings (Pending)	10
Cyrix M2 – PR166/200/233 MHz	10
Cyrix 6x86L CPUs Setting	11
Cyrix 6x86L – PR120+/PR133+/PR150+/PR166+ MHz	11
INTEL Pentium CPU Settings	12
CPU 1.5X Clock Setting (Red Caps)	12
Pentium – 75/90/100 MHz	12
CPU 2.0X Clock Setting (Red Caps)	12
Intel Pentium – 120/133 MHz	12
CPU 2.5X Clock Setting (Red Caps)	13

Intel Pentium – 150/166 MHz -----	13
CPU 3.0X Clock Setting (Red Caps) -----	13
Intel Pentium – 180/200 MHz -----	13
Cyrix 6x86 CPUs Setting-----	14
Cyrix 6x86 – PR120+ / PR133+ / PR150+ / PR166+ MHz-----	14
AMD K5 CPUs -----	15
CPU 1.5X Clock Setting (Red Caps) -----	15
AMD K5 – PR75 / PR90 / PR100 / PR120 / PR133 MHz---	15
CPU 2.5X Clock Setting (Red Caps) -----	15
AMD K5 – PR150 / PR166 MHz -----	15
Cache Memory Select -----	16
CPU Voltage Setting-----	16
Single Voltage for Intel P54C, Cyrix 6x86, AMD K5 (PR75–PR166)-----	16
Dual Regulator/Single Voltage for Intel P54C, Cyrix 6x86, AMD K5 (PR75–PR166) -----	16
Dual Regulator/Dual Voltage for Intel MMX, CYrix M2 (or 6x86L), AMD K6 -----	17
System Memory Configuration-----	17
Jumper Settings-----	18
Factory Fixed Jumpers-----	18
JP6: Clear CMOS Data -----	18
JP11, JP12: Bus Ratio Select -----	19
JP2, JP3: External Bus Frequency Select -----	19
Connectors-----	20
KB1: Keyboard Connector -----	20
MS1: PS/2 Mouse Connector -----	20
PRT1: Parallel Port-----	20
COM1 /COM2: Serial Port Connectors -----	20
FDC1: Floppy Drive Connector -----	20
IDE1 /IDE2: Primary/Secondary IDE Connectors-----	20
Power Connector -----	21
J2 – Reset Switch: -----	21
J2 – Keylock Switch:-----	21

J2 – Speaker Connector: -----	21
J2 – Turbo LED:-----	21
J1 – IDE LED Activity Light: -----	22
J1 – SMI Switch: -----	22
J1: – Infrared Port Module Connector: -----	22
USB1: USB Connector -----	22
Connectors Summary -----	23
PS/2 Mouse Connector Pin Assignment -----	23
COM1, 2 Serial Port Connectors Pin Assignment -----	23
J1 Switch Signal Summary -----	24
J2 Switch Signal Summary -----	25

Chapter 3: BIOS Setup ----- 26

Standard CMOS Setup -----	27
BIOS Features Setup -----	29
Chipset Features Setup -----	32
Power Management Setup -----	35
PnP/PCI Configuration Setup -----	37
Load Setup Defaults -----	39
Integrated Peripherals -----	40
Supervisor/User Password -----	43
IDE HDD Auto Detection -----	44
Save & Exit Setup -----	44
Exit Without Saving -----	44

Chapter 1

Introduction

Features

CPU

1. Supports Intel Pentium P54C/MMX (P55C) CPUs at 75 ~ 233 MHz
2. Supports Cyrix 6x86(L) CPUs at PR120⁺ ~ PR166⁺ MHz
3. Supports AMD K5, K6 CPUs at PR75 ~ PR233
4. Provides SOCKET 7 ZIF Socket
5. Supports CPU dual voltage circuit.

Chipset

1. Intel 82430VX chipset
2. PCI Rev 2.1 compliant

L2 Cache

1. Onboard supports 256K/512k write back cache with Pipelined Burst SRAMs

Main Memory

1. Memory range from 4MB (minimum) to 128MB (maximum) with DRAM Table Free configurations
2. Supports Fast Page Mode/EDO/BEDO DRAM with 60ns/70ns speed
3. Supports 4 pcs 72pin SIMM sockets

BIOS

1. AWARD Plug and Play BIOS
2. Supports Advanced Power Management Function
3. Flash Memory for easy upgrade

Giga I/O Function

1. Integrated USB (Universal Serial Bus) controller with two USB ports.
2. Supports 2 IDE channels with 4IDE devices (including 120MB IDE floppy)
3. Provides PCI IDE Bus Master function
4. One floppy port (including 3.5", 1.2MB Mode 3 function)
5. Two high speed 16550 FIFO UART ports
6. One parallel port with EPP/ECP/SPP capabilities
7. PS/2 mouse connector
8. Built-in RTC, CMOS, keyboard controller on single I/O chip

Other Functions

1. BABY AT size 22cm x 25cm
2. Supports 4PCI and 3ISA Add-In Slots
3. Supports SCSI/CD-ROM Boot function.

Note: Pentium MMX (P55C), Cyrix 6x86L/M2, and AMD K6 are dual voltage CPUs. JP21, JP22, JP23, and JP14 must be set correctly (refer to page 13). Check with your CPU supplier for CPU voltage specification.

Mainboard Layout with Default Settings

The default settings of the following figure is for the Intel MMX-166 with the 256K cache. For the best cooling effect, make sure the airflow from the CPU fan is facing to the heatsink.

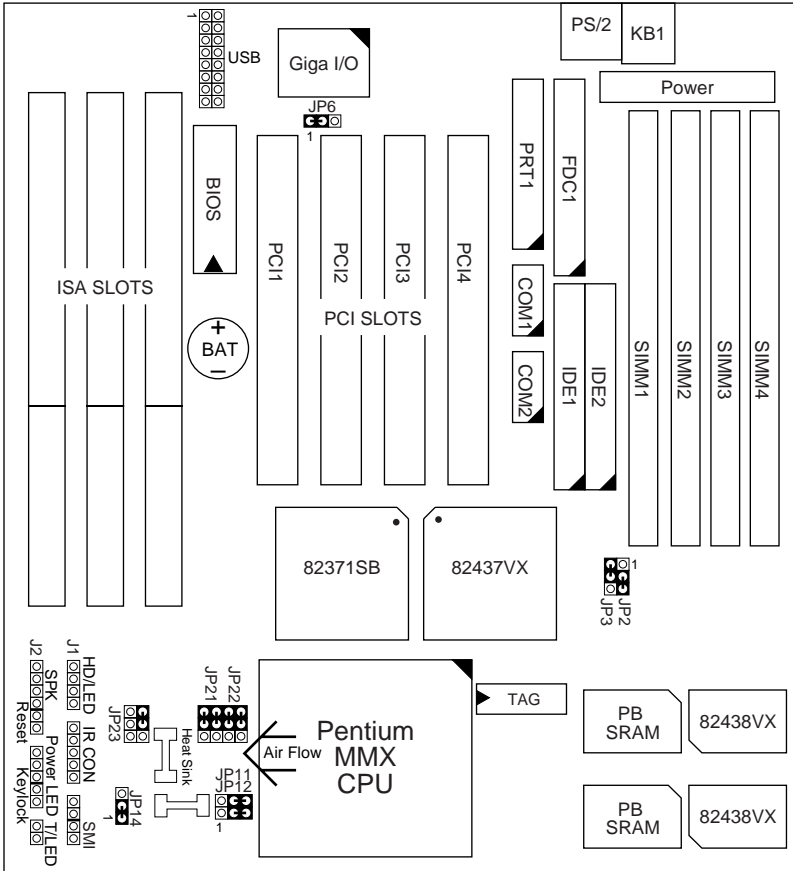


Figure 1-1. SL-53A2/A5 Motherboard Layout

Chapter 2

Hardware Setup

INTEL Pentium MMX CPU Settings

INTEL Pentium MMX — 166/200/233 MHz

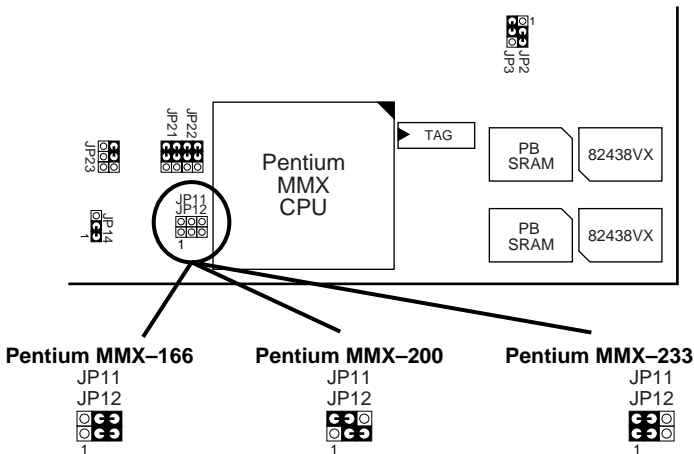


Figure 2-1. INTEL Pentium MMX CPU Type Configuration

Note: INTEL Pentium MMX (P55C) is a dual voltage CPU. JP21, 22, 23, and JP14 must be set correctly (refer to page 13.) Check with your CPU supplier for CPU voltage specification.

AMD K6 CPU Settings

AMD K6 – PR2–166/200/233 MHz

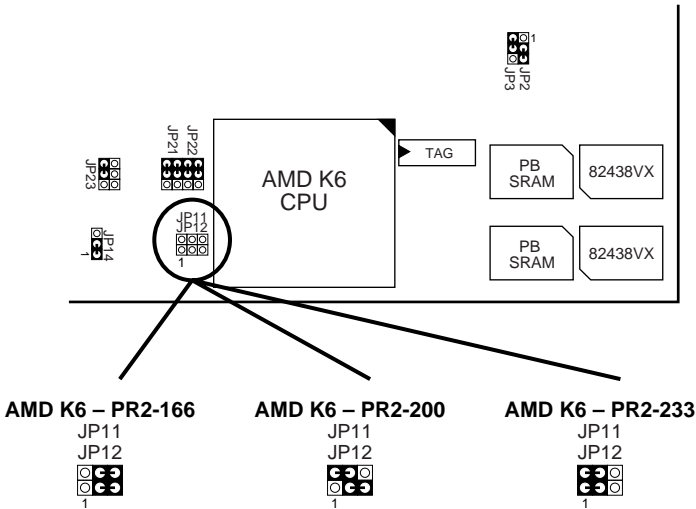


Figure 2–2. AMD K6 CPU Type Configuration

Note: AMD K6 is a dual voltage CPU. JP21, 22, 23, and JP14 must be set correctly (refer to page 13.) Check with your CPU supplier for CPU voltage specification.

Cyrix M2 CPU Settings (Pending)

Cyrix M2 – PR166/200/233 MHz

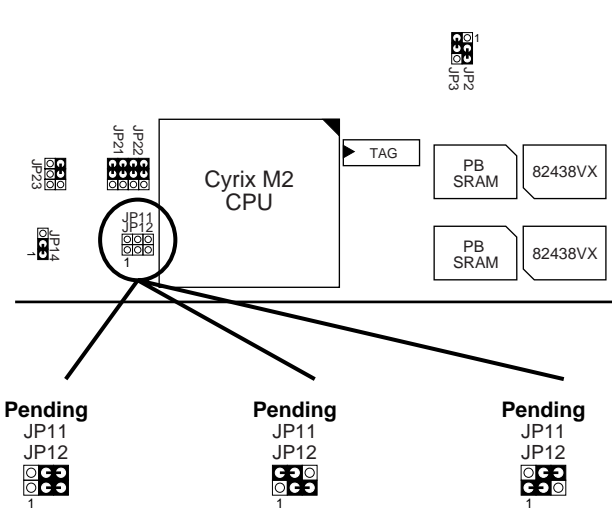


Figure 2–3. Cyrix M2 CPU Type Configuration

Note: Cyrix M2 is a dual voltage CPU. JP21, 22, 23, and JP14 must be set correctly (refer to page 13.) Check with your CPU supplier for CPU voltage specification.

Cyrix 6x86L CPUs Setting

Cyrix 6x86L – PR120+/PR133+/PR150+/PR166+ MHz

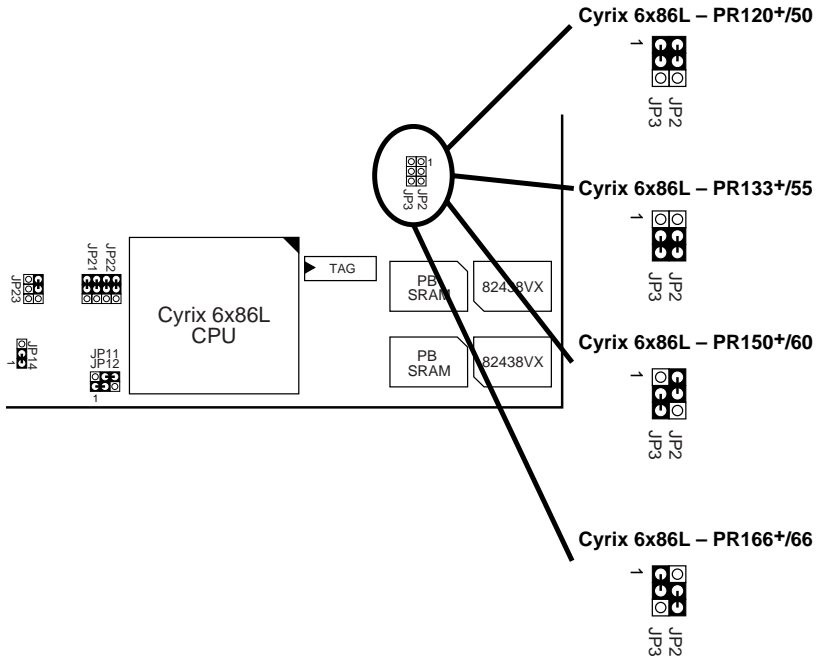


Figure 2–4. Cyrix 6x86L CPU Type Configuration

Note: Cyrix 6x86L is a dual voltage CPU. JP21, 22, 23, and JP14 must be set correctly (refer to page 13.) Check with your CPU supplier for CPU voltage specification.

INTEL Pentium CPU Settings

CPU 1.5X Clock Setting (Red Caps)

Pentium – 75/90/100 MHz

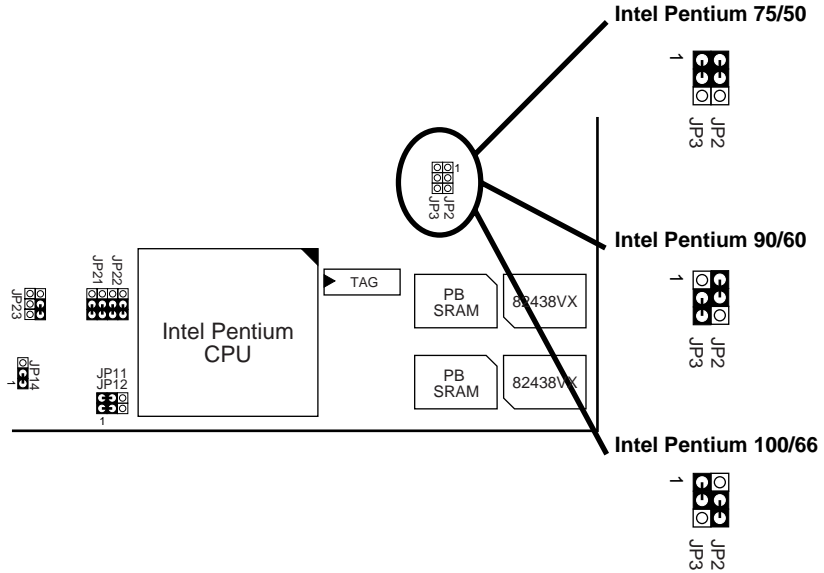


Figure 2-5. INTEL Pentium CPU Type Configuration

CPU 2.0X Clock Setting (Red Caps)

Intel Pentium – 120/133 MHz

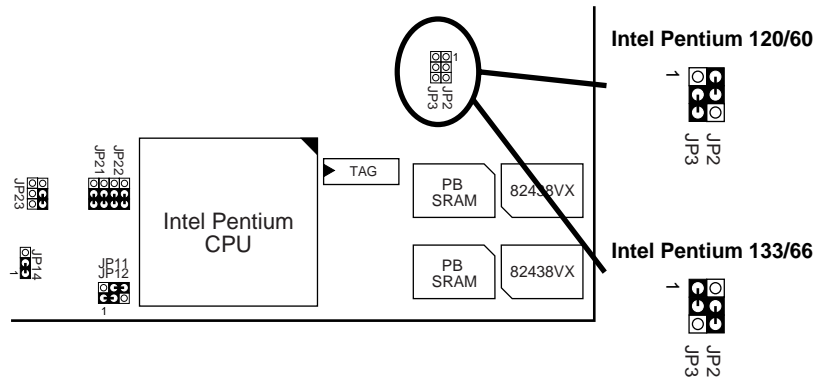


Figure 2-6. INTEL Pentium CPU Type Configuration

CPU 2.5X Clock Setting (Red Caps)

Intel Pentium – 150/166 MHz

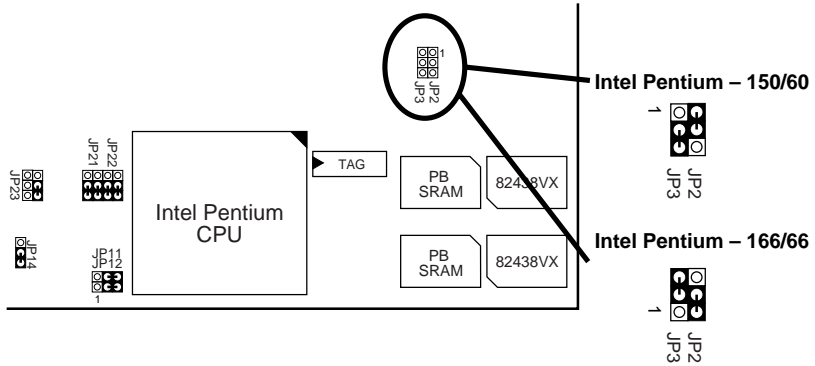


Figure 2-7. INTEL Pentium CPU Type Configuration

CPU 3.0X Clock Setting (Red Caps)

Intel Pentium – 180/200 MHz

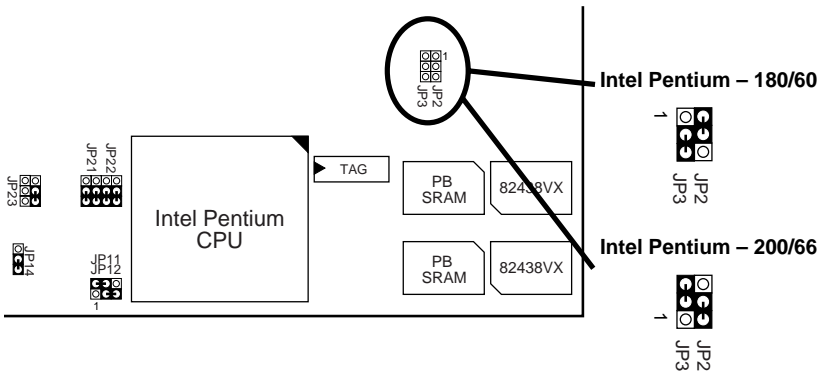


Figure 2-8. NTEL Pentium CPU Type Configuration

Cyrix 6x86 CPUs Setting

Cyrix 6x86 – PR120+/PR133+/PR150+/PR166+ MHz

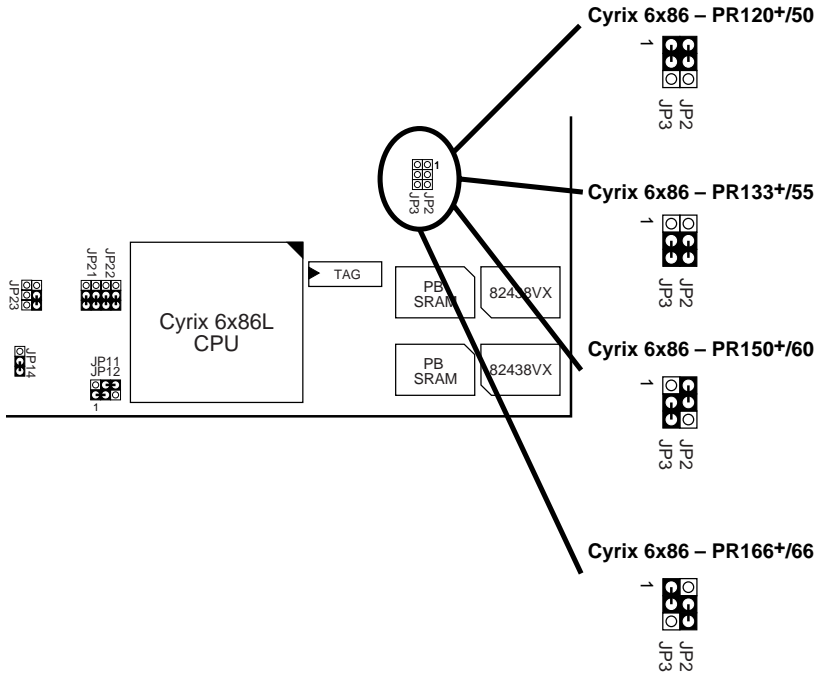


Figure 2–9. Cyrix 6x86 CPU Type Configuration

AMD K5 CPUs

CPU 1.5X Clock Setting (Red Caps)

AMD K5 – PR75/PR90/PR100/PR120/PR133 MHz

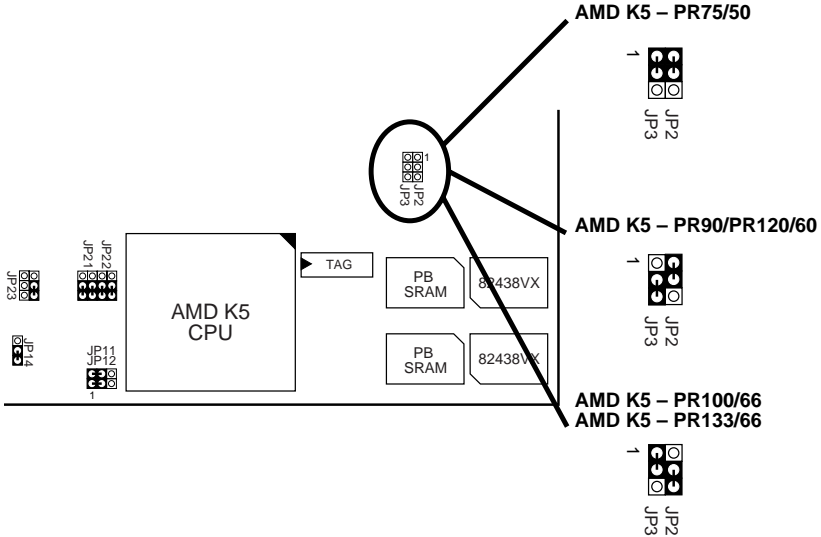


Figure 2–10. AMD K5 CPU Type Configuration

CPU 2.5X Clock Setting (Red Caps)

AMD K5 – PR150/PR166 MHz

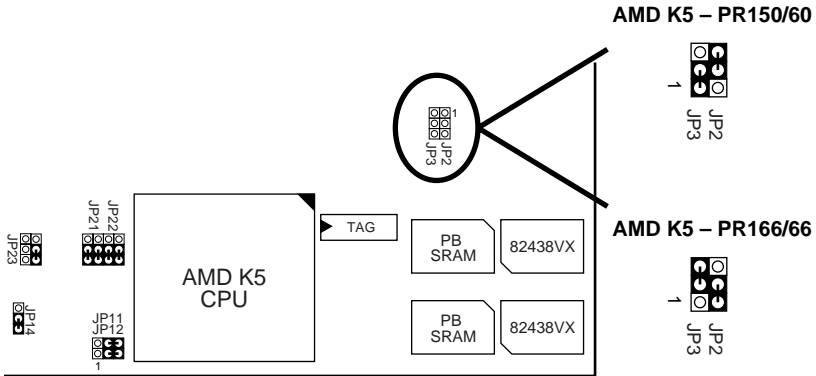


Figure 2–11. AMD K5 CPU Type Configuration

Cache Memory Select

The cache size (256K/512K) jumper is fixed by the factory of this model.

CPU Voltage Setting

Single Voltage for Intel P54C, Cyrix 6x86, AMD K5 (PR75–PR166)

Linear Regulator Circuit Setting (default)

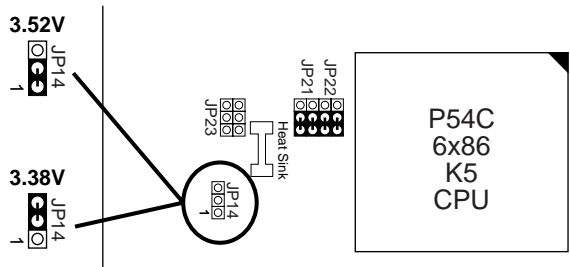


Figure 2-12-1. CPU Type Configuration

Dual Regulator/Single Voltage for Intel P54C, Cyrix 6x86, AMD K5 (PR75–PR166)

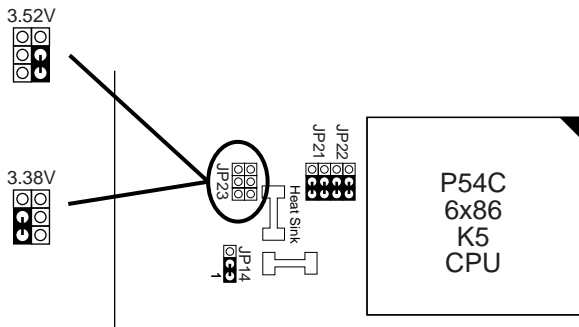


Figure 2-12-2. CPU Type Configuration

Dual Regulator/Dual Voltage for Intel MMX, Cyrix M2 (or 6x86L), AMD K6

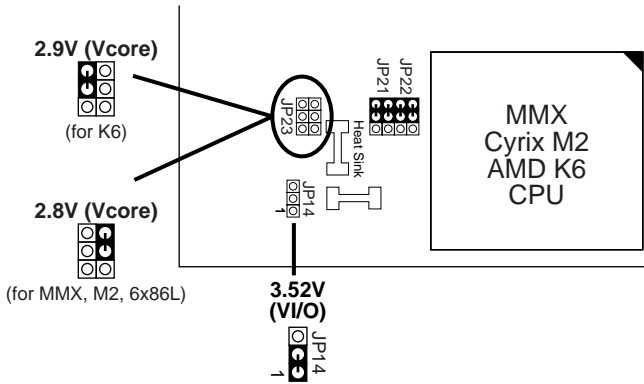


Figure 2-12-3 CPU Type Configuration

System Memory Configuration

This 82430VX motherboard supports 72-pin SIMMs of 4MB, 8MB, 16MB, or 32MB to form a memory size between 8MB to 128MB. Follow the chart below to install the memory modules.

Bank 0 SIMM 3 & 4	Bank 1 SIMM 1 & 2	Total Memory
4MB x 2	None	8MB
8MB x 2	None	16MB
16MB x 2	None	32MB
32MB x 2	None	64MB
None	4MB x 2	8MB
None	8MB x 2	16MB
None	16MB x 2	32MB
None	32MB x 2	64MB
4MB x 2	4MB x 2	16MB
4MB x 2	8MB x 2	24MB
4MB x 2	16MB x 2	40MB
4MB x 2	32MB x 2	72MB

8MB x 2	4MB x 2	24MB
8MB x 2	8MB x 2	32MB
8MB x 2	16MB x 2	48MB
8MB x 2	32MB x 2	80MB
16MB x 2	4MB x 2	40MB
16MB x 2	8MB x 2	48MB
16MB x 2	16MB x 2	64MB
16MB x 2	32MB x 2	96MB
32MB x 2	4MB x 2	72MB
32MB x 2	8MB x 2	80MB
32MB x 2	16MB x 2	96MB
32MB x 2	32MB x 2	128MB

Note: The 82430VX chipset supports “table free” function and the above table is just a reference.

Jumper Settings

Factory Fixed Jumpers

The following jumpers are set by the factory. Notice that the color of these two caps are BLACK.

Jumpers	Factory settings
JP6, JP14	Factory setting at 1-2
JP19	Factory setting at Open





JP6: Clear CMOS Data

Clear the CMOS memory by shorting this jumper momentarily; then remove the cap to retain new settings.

CMOS Data	JP6
Clear Data	2-3
Retain Data (default)	1-2





JP11, JP12: Bus Ratio Select

Set these jumpers according to your CPU clock.

Ratio	JP11 JP12
1.5X (default)	
2X	
2.5X	
3X	

JP2, JP3: External Bus Frequency Select

These 2 jumpers tell the clock generator what frequency to send to the CPU. Set these jumpers as shown, according to the CPU's internal clock speed. (For IMI Clock Generator.)

Settings	JP3, JP2
50MHz	
55MHz	
60MHz	
66MHz (default)	

Connectors

KB1: Keyboard Connector

A 5-pin female DIN keyboard connector is located at the upper right corner of the motherboard. Plug the keyboard jack direct to this connector.

MS1: PS/2 Mouse Connector

Attach PS/2 mouse cable to this 6-pin connector.

PRT1: Parallel Port

The system board provides a 2x13-pin parallel port connector, PRT1. Attach parallel port cable to this connector.

COM1 /COM2: Serial Port Connectors

The system board has two 2x5-pin serial port connectors, COM1 and COM2. Attach COM1/COM2 cables to these connectors.

FDC1: Floppy Drive Connector


The system board has a 2x17-pin floppy drive connector, FDC1. Connect one end of a floppy drive cable to this connector and the other end to a floppy drive.

IDE1/IDE2: Primary/Secondary IDE Connectors

The system board has a 32-bit Enhanced PCI IDE Controller that provides for two HDD connectors, IDE1 (primary) and IDE2 (secondary).

Power Connector

The power connector has two 6-pin male header connectors. Plug the dual connectors from the power directly onto the board connector while making sure the black leads are in the center.

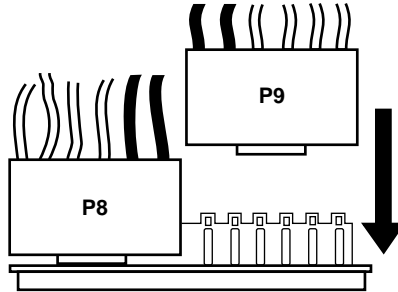

J2 – Reset Switch:

The system board has a 2-pin connector for rebooting your computer without having to turn off your power switch. This prolongs the life of the system's power supply.

J2 – Keylock Switch:

The keylock switch is a 5-pin connector for locking the keyboard for security purposes. (See the following drawing for jumper position, and pin1~3 is connected to power LED and pin 4~5 is connected to keylock switch.)

J2 – Speaker Connector:

The speaker connector is a 4-pin connector for connecting the system and the speaker. (See the following drawing for jumper position.)

J2 – Turbo LED:


Connect the case's turbo LED to this connector.

J1 – IDE LED Activity Light:

This connector connects to the hard disk activity indicator light on the case.

J1 – SMI Switch:

Toggle this jumper forces the system to sleep and the system won't wake up until the hardware event is coming. (The BIOS Power Management setting must be Enabled.)

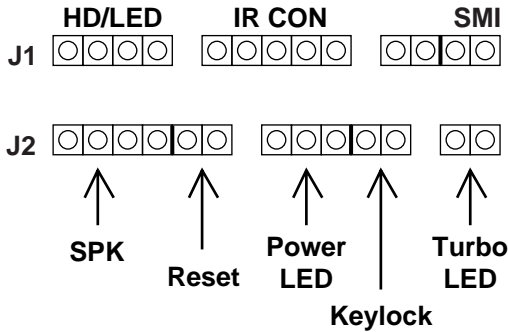


J1: – Infrared Port Module Connector:

The system board provides a 5-pin infrared connector—IR1 as an optional module for wireless transmitting and receiving. Pin 1 through 5 are Transmit, GND, Receive, NC, and Vcc, respectively.

USB1: USB Connector


This jumper connects to the USB cable to provide USB device.

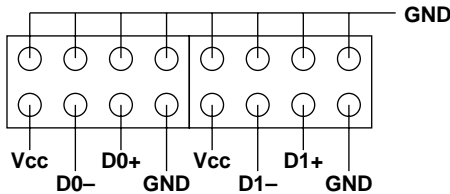

Connectors Summary


PS/2 Mouse Connector Pin Assignment

MS1 Top View

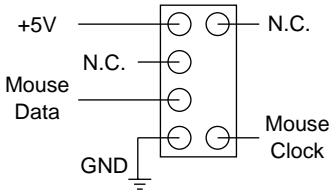

COM1, 2 Serial Port Connectors Pin Assignment

COM1/2 (Top View)

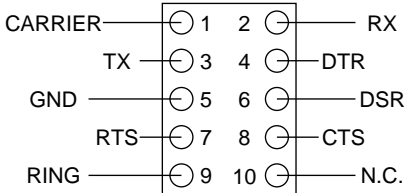

J1 Switch Signal Summary

J1	Pin	Signal Description
HDD LED Connector	1	+5V
	2	HDD LED Signal
	3	HDD LED Signal
	4	+5V
N.C.	5	No Connection
Infrared Connector	6	Infrared Transmit Signal
	7	GND
	8	Infrared Receive Signal (low speed)
	9	Infrared Receive Signal (high speed)
	10	+5V
N.C.	11	No Connection
N.C.	12	GND
	13	No Connection
SMI	14	GND
	15	SMI Signal

J2 Switch Signal Summary

J2	Pin	Signal Description
Speaker Connector	1	Speaker Signal
	2	No Connection
	3	Ground
	4	+5V
Reset Switch	5	Reset Signal
	6	Ground
N.C.	7	No Connection
Power LED Connector	8	+5V
	9	No Connection
	10	Ground
Keylock Connector	11	Keylock Signal
	12	GND
N.C.	13	No Connection
Turbo LED Connector	14	Turbo LED Connector
	15	Ground

Chapter 3

Award BIOS Setup

This 82430VX motherboard comes with the AWARD BIOS from AWARD Software Inc. Enter the Award BIOS program's Main Menu as follows:

1. Turn on or reboot the system.

After a series of diagnostic checks, the following message will appear:

PRESS TO ENTER SETUP

2. Press the key and the main program screen appears as in the following page.

ROM PCI/ISA BIOS
CMOS SETUP UTILITY
AWARD SOFTWARE, INC.

STANDARD CMOS SETUP	INTEGRATED PERIPHERALS
BIOS FEATURES SETUP	SUPERVISOR PASSWORD
CHIPSET FEATURES SETUP	USER PASSWORD
POWER MANAGEMENT SETUP	IDE HDD AUTO DETECTION
PNP/PCI CONFIGURATION	SAVE & EXIT SETUP
LOAD SETUP DEFAULTS	EXIT WITHOUT SAVING
Esc : Quit	↑ ↓ → ← : Select Item
F10 : Save & Exit Setup	(Shift) F2 : Change Color
Time, Date, Hard Disk Type...	

3. Using one of the arrows on your keyboard to select an option and press <Enter>. Modify the system parameters to reflect the options installed in the system.
4. You may return to the Main Menu anytime by press <ESC>.
5. In the Main Menu, "SAVE AND EXIT SETUP" saves your changes and reboots the system, and "EXIT WITHOUT SAVING" ignores your changes and exits the program.

Standard CMOS Setup

Standard CMOS Setup allows you to record some basic system hardware configuration and set the system clock and error handling. You only need to modify the configuration values of this option when you change your system hardware configuration or the configuration stored in the CMOS memory got lost or damaged.

Run the Standard CMOS Setup as follows:

1. Choose "STANDARD CMOS SETUP" from the Main Menu and a screen with a list of options appears.

ROM PCI/ISA BIOS
STANDARD CMOS SETUP
AWARD SOFTWARE, INC.

Date (mm:dd:yy) : Thu, May 9 1996																		
Time (hh:mm:ss) : 15 : 45 : 10																		
HARD DISKS	TYPE	SIZE	CYLS	HEAD	PRECOMP	LANDZ	SECTOR	MODE										
Primary Master	: Auto	0	0	0	0	0	0	Auto										
Primary Slave	: Auto	0	0	0	0	0	0	Auto										
Secondary Master	: Auto	0	0	0	0	0	0	Auto										
Secondary Slave	: Auto	0	0	0	0	0	0	Auto										
Drive A : 1.44M, 3.5 in.			<table border="0"> <tr> <td>Base Memory:</td> <td>640K</td> </tr> <tr> <td>Extended Memory:</td> <td>15360K</td> </tr> <tr> <td>Other Memory:</td> <td>384K</td> </tr> <tr> <td colspan="2"><hr/></td> </tr> <tr> <td>Total Memory:</td> <td>16384K</td> </tr> </table>						Base Memory:	640K	Extended Memory:	15360K	Other Memory:	384K	<hr/>		Total Memory:	16384K
Base Memory:	640K																	
Extended Memory:	15360K																	
Other Memory:	384K																	
<hr/>																		
Total Memory:	16384K																	
Drive B : None																		
Floppy 3 Mode Support : Disabled																		
Video : EGA/VGA																		
Halt On : All Errors																		
Esc : Quit			↑ ↓ → ← : Select Item			PU/PD/+/- : Modify												
F1 : Help			(Shift) F2 : Change Color															

2. Use one of the arrow keys to move between options and modify the selected options by using PgUp/PgDn/+/- keys.

A short description of screen options follows:

Date (mm:dd:yy)	Set the current date and time.
Time (hh:mm:ss)	
Primary (Secondary) Master/Slave	This field records the specifications for all non-SCSI hard disk drives installed in your system. Refer to the respective documentation on how to install the drivers.
Drive A/B	Set this field to the types of floppy disk drives installed in your system. The choices are: 360KB, 5.25 in., 1.2MB, 5.25 in., 720KB, 3.5 in., 1.44M, 3.5 in. (default), 2.88MB, 3.5 in., or None 120MB, 3.5in., IDE Floppy Drive (Auto detect).
Floppy 3 Mode Support	Drive A/B, Both: Enabled 3.5-inch, 1.2MB function. Disabled (default): Disabled 3.5-inch, 1.2MB function.
Video	Set this field to the type of video display card installed in the system. The choices are: Monochrome; Color 40x25; VGA/EGA (default); or Color 80x25
Halt On	Set this field to the type of errors that will cause the system to halt. The choices are: All Errors (default); No Errors; All, But Keyboard; All, But Diskette; or All, But Disk/Key

3. Press <ESC> to return to the Main Menu when you finish setting up in the "Standard CMOS Setup".

BIOS Features Setup

BIOS Features Setup allows you to improve your system performance or set up some system features according to your preference.

Run the BIOS Features Setup as follows:

1. Choose "BIOS FEATURES SETUP" from the Main Menu and a screen with a list of options appears.

ROM PCI/ISA BIOS BIOS FEATURES SETUP AWARD SOFTWARE, INC.	
CPU Internal Cache : Enabled	Video BIOS Shadow : Enabled
External Cache : Enabled	C8000-CBFFF Shadow : Disabled
Quick Power on Self Test : Enabled	CC000-CFFFF Shadow : Disabled
Boot Sequence : A,C, SCSI	D0000-D3FFF Shadow : Disabled
Swap Floppy Drive : Disabled	D4000-D7FFF Shadow : Disabled
Boot Up Floppy Seek : Disabled	D8000-DBFFF Shadow : Disabled
Boot Up NumLock Status : On	DC000-DFFFF Shadow : Disabled
Gate A20 Option : Fast	
Typematic Rate Setting : Disabled	
Typematic Rate (Chars/Sec): 6	ESC : Quit ↑ ↓ → ←: Select Item
Typematic Delay (Msec) : 250	F1 : Help PU/PD/+/- : Modify
Security Option : Setup	F5 : Old Values (Shift)F2 : Color
PCI/VGA Palette Snoop : Disabled	F6 : Load BIOS Defaults
OS/2 Select for DRAMs>64MB: Non-OS/2	F7 : Load Setup Defaults

2. Use one of the arrow keys to move between options and modify the selected options by using PgUp/PgDn/+/- keys. An explanation of the <F> keys follows:

<F1>: "Help" gives options available for each item.

Shift <F2>: Change color.

<F5> : Get the previous values. These values are the values with which the user started the current session.

<F6>: Load all options with the BIOS default values.

<F7>: Load all options with the Setup default values.

A short description of screen options follows:

CPU Internal Cache	Choose Enabled (default) or Disabled. This option allows you to enable or disable the CPU's internal cache.
External Cache	Choose Enabled (default) or Disabled. This option allows you to enable or disable the external cache memory.
Quick Power On Self Test	Choose Enabled (default) or Disabled. This option allows you to speed up the Power On Self Test routine.
Boot Sequence	Default is "A, C, SCSI". This option determines which drive to look for first for an operating system.
Swap Floppy Drive	Choose Enabled or Disabled (default). This option swaps floppy drive assignments when it is enabled.
Boot Up Floppy Seek	Enabled: During POST, BIOS checks the track number of the floppy disk drive to see whether it is 40 or 80 tracks. Disabled (default): During POST, BIOS will not check the track number of the floppy disk drive.
Boot Up NumLock Status	Choose On (default) or Off. This option lets user to activate the NumLock function at boot-up.

Gate A20 Option	Choose Normal or Fast (default). This option allows the RAM to access the memory above 1MB by using the fast gate A20 line.
Typematic Rate Setting	Choose Enabled or Disabled (default). Enable this option to adjust the keystroke repeat rate.
Typematic Rate (Chars/Sec)	Range between 6 (default) and 30 characters per second. This option controls the speed of repeating keystrokes.
Typematic Delay (Msec)	Choose 250 (default), 500, 750, and 1000. This option sets the time interval for displaying the first and the second characters.
Security Option	Choose System or Setup (default). This option is to prevent unauthorized system boot-up or use of BIOS Setup.
PCI/VGA palette Snoop	Choose Enabled or Disabled (default). It determines whether the MPEG ISA cards can work with PCI/VGA or not.
Video BIOS Shadow	Enabled (default): Map the VGA BIOS to system RAM. Disabled: Don't map the VGA BIOS to system RAM.
C8000-CBFFF to DC000-DFFF Shadow	These options are used to shadow other expansion card ROMs.

3. Press <ESC> and follow the screen instructions to save or disregard your settings.

Chipset Features Setup

Chipset Features Setup changes the values of the chipset registers. These registers control the system options.

Run the Chipset Features Setup as follows:

1. Choose "CHIPSET FEATURES SETUP" from the Main Menu and a screen with a list of options appears.

```
ROM PCI/ISA BIOS
CHIPSET FEATURES SETUP
AWARD SOFTWARE, INC.

Auto Configuration      : Enabled
DRAM Timing            : 70 ns

DRAM RAS# Precharge Time : 4
DRAM R/W Leadoff Timing : 6
Fast RAS# To CAS# Delay  : 3
DRAM Read Burst Timing  : x333/x444
DRAM Write Burts Timing : x333
Fast MA to RAS# Delay CLK: 1
Fast EDO Path Select    : Disabled
Refresh RAS# Assertio   : 5 Clks
ISA Bus Clock           : PCICLK/4

System BIOS Cacheable   : Disabled
Video BIOS Cacheable    : Disabled
8 Bit I/O Recovery Time : 3
16 Bit I/O Recovery Time: 2
Memory Hole At 15M-16M  : Disabled
Peer Concurrency        : Enabled
Chipset NA# Asserted    : Enabled

ESC : Quit      ↑ ↓ → ← : Select Item
F1  : Help      PU/PD/+/- : Modify
F5  : Old Values (Shift)F2 : Color
F6  : Load BIOS Defaults
F7  : Load Setup Defaults
```

2. Use one of the arrow keys to move between options and modify the selected options by using PgUp/PgDn/+/- keys.

A short description of screen options follows:

Auto Configuration Choose Enabled (default) or Disabled. The system sets all options on the left side of the screen automatically when choose Enabled.

DRAM Timing Choose 60ns or 70ns (default). Do not change this setting unless you know the DRAM access time spec.

DRAM RAS# Precharge Time	Use the default setting. This option allows you to determine the number of the CPU clocks allocated for the RAS to accumulate / charge it before the DRAM is refreshed.
DRAM R/W Leadoff Timing	Use the default setting. This sets the point of time that the CPU is allowed to read and write to DRAM and then perform.
Fast RAS To CAS Delay	Use the default setting. This setup option allows you to determine the delay time in completing the transition from RAS to CAS.
DRAM Read Burst DRAM Write Burst Timing (EDO/FPM)	Use the default setting. Burst read / write requests are generated by the CPU in four separate parts. The 1st part provides the location within the DRAM where the read or write is to take place while the remaining three parts provide the actual data. The lower the timing number is, the faster the system memory will be addressed.
Fast MA to RAS# Delay CLK	Use the default setting. This item allows you to determine the timing of the transition from ROW Address Strobe (RAS) to Column Address Strobe (CAS).
Fast EDO Path Select	Choose Enabled or Disabled (default).
Refresh RAS# Assertion	Use the default setting.

ISA Bus Clock	Default is PCICLK/4. The best value is as close to 8MHz as possible.
System BIOS Cacheable	Choose Enabled or Disabled (default). When Enabled, the access to the system BIOS ROM addressed at F0000H-FFFFFH is cached.
Video BIOS Cacheable	Choose Enabled or Disabled (default). When Enabled, the access to the VGA BIOS ROM addressed at C0000H-C7FFFH is cached.
8 Bit I/O Recovery Time Select Item	This delay happens when the CPU is running so much faster than the I/O bus that the CPU must be delayed to allow for the completion of the I/O. The choices for 8 bit I/O are NA, 1 to 8 CPU clock. Default is 3. The choices for 16 bit I/O are NA, 1 to 4 CPU clock. Default is 2.
16 Bit I/O Recovery Time Select Item	
Memory Hole At 15M-16M	Choose Enabled or Disabled (default). In order to improve performance, certain space in memory can be reserved for ISA cards. This memory must be mapped into the memory's space below 16MB.
Peer Concurrency	Choose Enabled (default) or Disabled. Peer concurrency means that more than one PCI device can be active at a time.

Chipset NA# Asserted Enabled (default) : Enable CPU pipeline function.
 Disabled: Disable CPU pipeline function.

3. Press <ESC> and follow the screen instructions to save or disregard your settings.

Power Management Setup

Power Management Setup sets the system's power saving functions.

1. Choose "POWER MANAGEMENT SETUP" from the Main Menu and a screen with a list of options appears.

ROM PCI/ISA BIOS POWER MANAGEMENT SETUP AWARD SOFTWARE, INC.	
Power Management : Disabled	** Power Down & Resume Events **
PM Control by APM : No	IRQ 3 (COM 2) : ON
Video Off Method : V/H SYNC+Blank	IRQ 4 (COM 1) : ON
Modem Use IRQ : 3	IRQ 5 (LPT 2) : ON
	IRQ 6 (Floppy Disk) : ON
Doze Mode : Disabled	IRQ 7 (LPT 1) : ON
Standby Mode : Disabled	IRQ 8 (RTC Alarm) : OFF
Suspend Mode : Disabled	IRQ 9 (IRQ2 Redir) : ON
HDD Power Down : Disabled	IRQ 10 (Reserved) : ON
	IRQ 11 (Reserved) : ON
** Wake Up Events In Doze & Standby **	IRQ 12 (PS/2 mouse) : ON
IRQ3 (Wake-Up Event) : ON	IRQ 13 (Coprocessor) : ON
IRQ4 (Wake-Up Event) : ON	IRQ 14 (Hard Disk) : ON
IRQ8 (Wake-Up Event) : ON	IRQ 15 (Reserved) : ON
IRQ12 (Wake-Up Event) : ON	
	ESC : Quit ↑ ↓ → ← : Select Item
	F1 : Help PU/PD/+/- : Modify
	F5 : Old Values (Shift)F2 : Color
	F6 : Load BIOS Defaults
	F7 : Load Setup Defaults

2. Use one of the arrow keys to move between options and modify the selected options by using PgUp/PgDn/+/- keys.

A short description of screen options follows:

Power Management Choose Max. Saving, User Define, Disabled (default), or Min Saving.

PM Control by APM Choose Yes or No (default). You need to choose Yes when the operating system has the APM functions, choose No otherwise.

Video Off Method Choose Blank , DPMS, or V/H Sync+Blank (default). You can chose either DPMS or V/H Sync+Blank when the monitor has the Green function. You need to choose Blank when the monitor does not have the Green function.

Note: Some VGA cards don't allow V/H Sync to be turned off directly.

Modem Use IRQ Assign the IRQ number to the modem which is being used so that the ring signal can wakeup the system. The default setting is 3 (COM2).

Doze Mode This option sets the CPU speed down to 33MHz during this mode.

Standby Mode Suspend Mode These two options allow you to choose the mode for the different timers. The Standby Mode turns off the VGA monitor, and the Suspend Mode turns off the CPU and saves the energy of the system.

HDD power Down Time is adjustable from 1 to 15 minutes. When the set time has elapsed, the BIOS sends a command to the HDD to power down, which turns off the motor.

IRQx (Wake-Up Event) Set these IRQs individually. Activity detected from any enabled IRQ channel (ON) will wake up the system.

3. Press <ESC> and follow the screen instructions to save or disregard your settings.

PnP/PCI Configuration Setup

PnP/PCI Configuration Setup configures the PCI bus slots.

Run the Chipset Features Setup as follows:

1. Choose “PnP/PCI CONFIGURATION SETUP” from the Main Menu and a screen with a list of options appears.

ROM PCI/ISA BIOS
PNP/PCI CONFIGURATION
AWARD SOFTWARE, INC.

Resources Controlled By : Manual Reset Configuration Data : Disabled	PCI IRQ Activated By : Level PCI IDE IRQ Map To : PCI-AUTO Primary IDE INT# : A Secondary IDE INT# : B
IRQ-3 assigned to : Legacy ISA IRQ-4 assigned to : Legacy ISA IRQ-5 assigned to : PCI/ISA PnP IRQ-7 assigned to : PCI/ISA PnP IRQ-9 assigned to : PCI/ISA PnP IRQ-10 assigned to : PCI/ISA PnP IRQ-11 assigned to : PCI/ISA PnP IRQ-12 assigned to : PCI/ISA PnP IRQ-14 assigned to : PCI/ISA PnP IRQ-15 assigned to : PCI/ISA PnP DMA-0 assigned to : PCI/ISA PnP DMA-1 assigned to : PCI/ISA PnP DMA-3 assigned to : PCI/ISA PnP DMA-5 assigned to : PCI/ISA PnP DMA-6 assigned to : PCI/ISA PnP DMA-7 assigned to : PCI/ISA PnP	Used MEM Base Addr : N/A Used MEM Length* : 8K
	ESC : Quit ↑ ↓ → ← : Select Item F1 : Help PU/PD/+/- : Modify F5 : Old Values (Shift)F2 : Color F6 : Load BIOS Defaults F7 : Load Setup Defaults

2. Use one of the arrow keys to move between options and modify the selected options by using PgUp/PgDn/+/- keys.

A short description of screen options follows:

Resources Controlled By	Choose Manual (default) or Auto. The BIOS checks the IRQ/DMA channel number on the ISA and PCI card manually if chose Manual and the IRQ/DMA channel number will be checked automatically if choose Auto.
Reset Configuration Data	Choose Enabled or Disabled (default). Disabled means to retain PnP configuration data in BIOS and Enabled means to reset PnP configuration data in BIOS.
IRQ-x assigned to DMA-x assigned to	Legacy ISA: Manually assigns IRQ/DMA to device. PCI/ISA PnP: BIOS assigns IRQ/DMA to device automatically.
PCI IRQ Activated By	Choose Edge or Level (default). Most PCI trigger signals are Level.
PCI IDE IRQ Map To	Select PCI-AUTO (default), ISA, or assign a PCI SLOT number (depending on which slot the PCI IDE is inserted). If PCI-AUTO does not work, then assign an individual PCI SLOT number.
Primary/ IDE INT#	Choose A (default), B, C, or D.
Secondary IDE INT#	Choose A, B (default), C, or D.
Used MEM Base Addr	Choose N/A (default) or ISA legacy card requests to have memory start address.

**Used MEM
Length***

Choose 8K, 16K, 32K, or 64K.

With the above two functions, users can define where the used memory address is located and its corresponding length of the legacy area. BIOS will skip the UMB area which is used by the legacy device to avoid memory space conflict.

* This function actives only when the "Used MEM Base Addr" is chosen.

3. Press <ESC> and follow the screen instructions to save or disregard your settings.

Load Setup Defaults

Load Setup Defaults option loads the default system values to the system configuration fields. If the CMOS is corrupted the defaults are loaded automatically. Choose this option and the following message appears:

"Load Setup Defaults (Y/N)? N"

To use the Setup defaults, change the prompt to "Y" and press <Enter>.

Integrated Peripherals

Integrated Peripherals option changes the values of the chipset registers. These registers control system options in the computer.

1. Choose "INTEGRATED PERIPHERALS" from the Main Menu and a screen with a list of options appears.

```
ROM PCI/ISA BIOS
INTEGRATED PERIPHERALS
AWARD SOFTWARE, INC.
```

IDE HDD Block Mode : Enabled	
IDE Primary Master PIO : Auto	
IDE Primary Slave PIO : Auto	
IDE Secondary Master PIO : Auto	
IDE Secondary Slave PIO : Auto	
On-Chip Primary PCI IDE: Enabled	
On-Chip Secondary PCI IDE: Enabled	
PCI Slot IDE 2nd Channel : Enabled	
USB Controller : Disabled	
KBC Input Clock : 8 MHz	
Onboard FDD Controller : Enabled	
Onboard Serial Port 1 : Auto	
Onboard Serial Port 2 : Auto	
UR2 Mode : Standard	
UR2 Duplex Mode : Half	
Onboard Parallel Port : 378H/IRQ7	
Parallel Port Mode : SPP	

```
ESC : Quit      ↑ ↓ → ← : Select Item
F1  : Help      PU/PD/+/- : Modify
F5  : Old Values (Shift)F2 : Color
F6  : Load BIOS Defaults
F7  : Load Setup Defaults
```

2. Use one of the arrow keys to move between options and modify the selected options by using PgUp/PgDn/+/- keys.

A short description of screen options follows:

IDE HDD Block Mode Choose Enabled (default) or Disabled. If your hard disk size is larger than 540MB, choose Enabled, and, if you are using the IDE HDD Auto Detection option, the BIOS will choose this option automatically. (Note: Some old HDD models don't provide this feature.)

IDE Primary Master/Slave PIO IDE Secondary Master/Slave PIO	Choose Auto (default) or Mode 0~4. The BIOS will detect the HDD Mode type automatically when you choose Auto. You need to set to a lower mode than Auto when your hard disk becomes unstable.
On-Chip Primary/ Secondary PCI IDE	Enabled (default): Turn on the onboard IDE function. Disabled: Turn off the onboard IDE function.
PCI Slot IDE 2nd Channel	Enabled (default) : Reserved IRQ15 for secondary IDE device. Disabled: Release IRQ15 for other devices.
USB Controller	Enabled: Enable USB function and it will occupy one IRQ, usually the IRQ11. Disabled (default): Disable USB function and it will not occupy IRQ. Choose Disabled when it is not connect to an USB device.
KBC Input Clock	Choose 8 MHz (default) or 12 MHz.
Onboard FDD Controller	Choose Enabled (default) or Disabled. Choose Disabled when you use an ISA card with FDD function, or , choose Enabled to use the onboard FDD connector.
Onboard Serial Port 1	Choose Auto (default), 3F8/IRQ4 , 2F8/IRQ3, 3E8/IRQ4, 2E8/IRQ3, or Disabled. Do no set port 1 & 2 to the same value except for Disabled.

Onboard Serial Port 2 Choose Auto (default), 3F8/IRQ4, 2F8/IRQ3, 3E8/IRQ4, 2E8/IRQ3, or Disabled.

UR2 Mode Choose Standard (default), IrDA1.0, ASKIR, MIR 0.57M, MIR 1.15M, or FIR.

UR2 Duplex Mode* Choose Half (default), or Full.
Half: Doesn't transmit and receive activities at the same time.
Full: Transmit and receive activities at the same time.

**: This option won't work unless UR2 Mode IrDA/AASKIR/MIR/FIR is selected.*

Onboard Parallel Port Choose the printer I/O address: 378H/IRQ7 (default), 3BCH/IRQ7, 278H/IRQ5

Onboard Parallel Mode Choose SPP (default), ECP + EPP, EPP, or ECP mode. The mode depends on your external device that connects to this port.

ECP Mode Use DMA* Choose DMA3 (default) or DMA1. Most sound cards use DMA1. Check with your sound card configuration to make sure that there is no conflict with this function.

**: This option will not be displayed unless the EPP/ECP function is selected..*

3. Press <ESC> and follow the screen instructions to save or disregard your settings.

Supervisor/User Password

These two options allow you to set your system passwords. Normally, supervisor has a higher right to change the CMOS setup option than the user. The way to set up the passwords for both Supervisor and User are as follows:

1. Choose "Change Password" in the Main Menu and press <Enter>. The following message appears:
"Enter Password:"
2. The first time you run this option, enter your password up to only 8 characters and press <Enter>. The screen does not display the entered characters.
3. After you enter the password, the following message appears prompting you to confirm the password:
"Confirm Password:"
4. Enter exactly the same password you just typed again to confirm the password and press <Enter>.
5. Move the cursor to Save & Exit Setup to save the password.
6. If you need to delete the password you entered before, choose the Supervisor Password and press <Enter>. It will delete the password that you had before.
7. Move the cursor to Save & Exit Setup to save the option you did, otherwise the old password will still be there when you turn on your machine next time.
8. Press <ESC> to exit to the Main Menu.

Note: If you forget or lose the password, the only way to access the system is to clear the CMOS RAM by setting JP6. All setup information will be lost and you need to run the BIOS setup program again.

IDE HDD Auto Detection

IDE HDD Auto Detection detects the parameters of an IDE hard disk drive and automatically enters them to the Standard CMOS Setup screen.

The screen will ask you to select a specific hard disk for Primary Master after you select this option. If you accept a hard disk detected by the BIOS, you can enter “Y” to confirm and then press <Enter> to check next hard disk. This function allows you to check four hard disks and you may press the <ESC> after the <Enter> to skip this function and go back to the Main Menu.

Save & Exit Setup

Save & Exit Setup allows you to save all modifications you have specified into the CMOS memory. Highlight this option on the Main Menu and the following message appears:

```
SAVE to CMOS and EXIT (Y/N)? Y
```

Press <Enter> key to save the configuration changes.

Exit Without Saving

Exit Without Saving allows you to exit the Setup utility without saving the modifications that you have specified. Highlight this option on the Main Menu and the following message appears:

```
Quit Without Saving (Y/N)? N
```

You may change the prompt to “Y” and press <Enter> key to leave this option.